








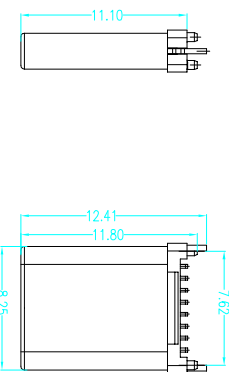


RoHS 客户图



拾取盖尺寸



RECOMMENDED PEEK LAYOUT(=0.80/0.05)
COMPONENT SOLDER(=10.05)

目錄 MAPX A0	變更內容 MODIFICATION NEW	日期 DATE 09-10-20
------------------	-----------------------------	------------------------

NOTES:

SPECIFICATION:

- CURRENT RATING: 3.0A MAX
- VOLTAGE: 100 VAC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS MIN.
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N
- DURABILITY: 10,000 CYCLES

A1	GND	B12	GND
A2	B11	B10	
A3	B9	B8	
A4	VBUS	B7	
A5	CC1	B6	
A6	DP1	B5	
A7	DN1	B4	
A8	SBU1	B3	
A9	VBUS	B2	
A10	B1	B1	
A11	GND	B1	
A12	GND	B1	
PIN	SIGNAL NAME	PIN	SIGNAL NAME

PART NO: **8001M-1600003-B**

SERISE: TYPE C

PLUG

serial number

Variable

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE	公差	UNIT	比例	日期	制图	审核	核准	产品料号	产品名称	TYPE C 16F拉伸公头,180度SMT H=11.1无脚
X	±0.30	X'	±5'	2009/10/20	王冠	雷永健	雷永健	8001M-1600003-B	产品名称	
X	±0.25	X'	±2'		雷永健	雷永健	雷永健		联系方式	mailto:sale1@xfll.com
XX	±0.20	XX'	±1'		雷永健	雷永健	雷永健		联系方式	www.xfll.com.com
XXX	±0.15	XXX'	±0.5'		雷永健	雷永健	雷永健		联系方式	

深圳市鑫风雷电子有限公司
Shenzhen xinfenglei Electronics Co., Ltd